

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number  
**WO 2004/090885 A1**

(51) International Patent Classification<sup>7</sup>: **G11B 19/02**

Hyung Sun [KR/KR]; 286-266, Huigyeong 2-dong, Dong-daemoon-gu, 130-878 Seoul (KR).

(21) International Application Number:  
PCT/KR2004/000814

(74) Agent: **PARK, Lae Bong**; 1Fl., Dongun Bldg., 413-4, Dogok 2-dong, Gangnam-gu, Seoul 135-272 (KR).

(22) International Filing Date: 8 April 2004 (08.04.2004)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
10-2003-0022390 9 April 2003 (09.04.2003) KR

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, 150-010 Seoul (KR).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **KIM, Byung Jin** [KR/KR]; 111-204, Hansol Chungu APT., 110, Jeongja-dong, Bundang-gu, 463-010 Sungnam, Kyunggi-do, (KR). **SEO, Kang Soo** [KR/KR]; 606-503, Chowon Hanyang Apt., 897-5, Pyoungan-dong, Dongan-gu, Anyang, Kyunggi-do, 431-075 (KR). **KIM,**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: RECORDING MEDIUM HAVING A DATA STRUCTURE FOR MANAGING REPRODUCTION OF TEXT SUBTITLE DATA AND METHODS AND APPARATUSES OF RECORDING AND REPRODUCING

### Packetized Elementary Stream

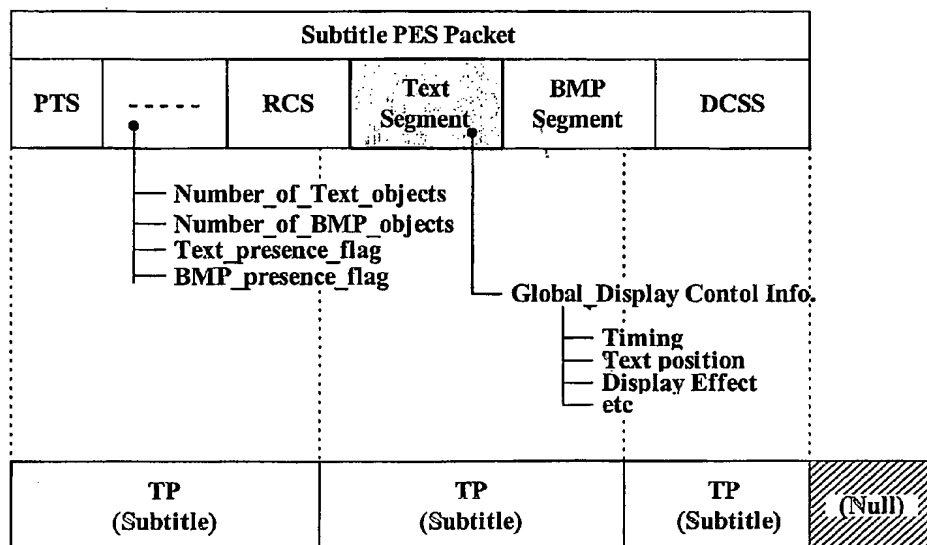

### Transport Stream

(57) Abstract: In the a data structure, a subtitle area of the recording medium stores a text subtitle stream including text subtitle data and at least one of global style information and local style information. The global style information provides at least one of composition information and rendering information, and the local style information provides font information for at least a portion of the text subtitle data.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

# DESCRIPTION

## RECORDING MEDIUM HAVING A DATA STRUCTURE FOR MANAGING REPRODUCTION OF TEXT SUBTITLE DATA AND METHODS AND APPARATUSES OF RECORDING AND REPRODUCING

### 1. TECHNICAL FIELD

The present invention relates to a recording medium having a data structure for managing reproduction of text subtitle data and methods and apparatuses of recording and reproducing.

### 2. BACKGROUND ART

Optical disks capable of storing large amounts of high-quality digital video/audio data, for example, DVDs (digital versatile disks), and DVD recording/reproducing apparatuses are now commercially available.

Text subtitle data, such as caption data to be superimposed on main video data is recorded on a DVD as image data (e.g., BMP data). An optical disk reproducing apparatus reproduces the subtitle image data along with the main video data from the DVD and displays the main data and text subtitle data on an external display apparatus connected to the optical disk reproducing apparatus.

A user of such an optical disk reproducing apparatus, therefore, can view the main video data of a DVD overlaid with related subtitle text data using a display apparatus.

Recently, the standardization of new high-density optical disks having higher recording density than a DVD has been progressing rapidly. The Blu-ray Disc ROM (BD-ROM) is one example of these new optical disks. In addition, methods for

managing text subtitle data, which are capable of displaying the main video data of a BD-ROM with superimposed captions by recording image data of subtitles on the BD-ROM (e.g., BMP data), and control information, for display control of the  
5 image data on the BD-ROM, have been proposed.

In the case where the text subtitle data is recorded as image data such as BMP data, the character attributes of the recorded text subtitle data (e.g., the character font and the character size) cannot be changed or a large amount of image  
10 data for displaying the subtitle in various ways is additionally required. A method of effectively managing text subtitle data for a high-density recording medium such as an optical disk is not yet available.

### 3. DISCLOSURE OF INVENTION

15 The recording medium according to the present invention includes a data structure for managing reproduction of text subtitle data.

In one embodiment, the recording medium includes a subtitle area storing a text subtitle stream. The text  
20 subtitle stream includes text subtitle data and at least one of global style information and local style information. The global style information provides at least one of composition information and rendering information, and the local style information provides font information for at least a portion  
25 of the text subtitle data.

For example, in one embodiment, the composition information includes position information for positioning a text subtitle represented by the text subtitle data on a display.

30 As another example, in one embodiment, the rendering information includes a display effect of the text subtitle data.

As an example of the font information, one embodiment

discloses the font information of font, font size and a font style.

The present invention further provides apparatuses and methods for recording and reproducing the data structure  
5 according to the present invention, and recording and reproducing data streams according to the present invention.

#### 4. BRIEF DESCRIPTION OF DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention, illustrate example  
10 embodiments of the invention, and together with the description, serve to explain the principles of the present invention.

In the drawings:

Fig. 1 illustrates an example embodiment of a data  
15 structure recorded on a recording medium for managing reproduction of text subtitle data in accordance with the present invention;

Fig. 2 illustrates one example embodiment of global display control information included in a data structure  
20 recorded on a recording medium for managing reproduction of text subtitle data;

Fig. 3 illustrates another example embodiment of global display control information included in a data structure  
recorded on a recording medium for managing reproduction of  
25 text subtitle data;

Fig. 4 illustrates an example embodiment of local display control information included in text segment of a subtitle in accordance with the present invention;

Fig. 5 illustrates an example embodiment of local display  
30 control information included in a display control sequence segment of a subtitle in accordance with the present invention;

Fig. 6 illustrates another example embodiment of local display control information included in a text segment of an exemplary subtitle in accordance with the present invention;

Fig. 7 illustrates a block diagram of a subtitle decoding system embodying the present invention; and

Fig. 8 illustrates an embodiment of a recording and reproducing apparatus according to the present invention.

## 5. MODES FOR CARRYING OUT THE INVENTION

In order that the invention may be fully understood, exemplary embodiments thereof will now be described with reference to the accompanying drawings.

Fig. 1 illustrates an example embodiment of a data structure recorded on a recording medium for managing reproduction of text subtitle data. In this and the following examples, a BD-ROM will be cited as the high density recording medium; however, the present invention is not limited to this example. As shown in Fig. 1, a PES (packetized elementary stream) packet for a subtitle of a BD-ROM includes a text segment, a BMP segment, and a display control sequence segment.

The text segment includes the number of character codes, a unique object ID for each text object and a plurality of character codes for each character code number. The BMP segment includes BMP data and a unique object ID for each BMP object.

The display control sequence segment includes display control information for a number of display sequences. The display control information includes, for example, cut-in time and cut-out time of a subtitle, a unique object ID to which each display control sequence applies, etc.

The PES packet of the subtitle also includes, among other things not shown for the sake of brevity, a presentation time stamp (PTS), a flag (or an indicator) `text_presence_flag`

indicating whether a text segment exists in the subtitle PES,  
a flag (or indicator) BMP\_presence\_flag indicating whether a  
BMP segment exists in the subtitle PES, the number of text  
objects included in the subtitle PES, and the number of BMP  
5 objects included in the subtitle PES.

The PES packet further includes a page composition  
segment providing composition and rendering information for an  
entire page or display screen, a global palette providing  
color information, and a global transparency array providing  
10 transparency information. For the sake of brevity, these  
elements not directly related to subject matter of the present  
invention, will not be described in detail.

The PES packet additionally includes a region composition  
segment. For each object in a number of objects, the region  
15 composition segment provides a unique object ID, and  
horizontal and vertical positioning on a display of the object  
region identified by the object ID.

Fig. 2 graphically illustrates the text subtitle PES  
packet of Fig. 1 and further shows global display control  
20 information included in this data structure. As shown, the PES  
packet is recorded on a BD-ROM as a plurality of transport  
packets, each having 188 bytes. Null data may be stuffed into  
a transport packet for making its size 188 bytes. The global  
display control information provides for display control of  
25 the character codes included in the text segment and includes  
timing information, composition information and rendering  
information. For example, the composition information may  
include text position information for positioning a text  
subtitle or caption represented by the text subtitle data  
30 (e.g., character codes) on a display. The rendering  
information may include display effect information, etc.

As shown in Fig. 2, the global display control  
information may be written in the text segment. For example,

the global display control information may be included in the text data of the character codes or stored separately from the text data.

Alternatively, the global display control information may  
5 be written in the display control sequence segment as shown in Fig. 3.

The data structure for managing the text subtitle may also include local display control information, which is different from the global display control information. Local  
10 control information provides font information for at least a portion of the text subtitle data (e.g., the character codes). The font information may include attributes of the character codes such as the text font, the text or font size, font style (e.g., italic, bold, underline, etc.), etc.

15 Fig. 4 illustrates an example of local display control information included in the text data of the character codes. The local control information provides font information for at least a portion of the text subtitle data (e.g., the character codes) sequentially recorded after the local control  
20 information. In this example, character codes '0x41' (A) and '0x42' (B) have control codes '0x00' (escape code), '0x11' (italic function), and '0x01' (italic on) recorded prior to and in association therewith such that these characters are displayed as italic characters 'A' and 'B'. Similarly, the  
25 same subsequent character codes have control codes '0x00' (escape code), '0x11' (italic function), and '0x00' (italic off) recorded prior to and in association therewith such that these characters are displayed as normal characters 'A' and 'B'.

30 Fig. 5 illustrates an example of local display control information included in the display control sequence segment. In this example, a second set of character codes '0x41' (A) and '0x42' (B) have a segment ID of '1', and the DCSS includes



local display control information having a matching the segment ID (i.e., '1') and font information. Here, in this example, the font information is shown to be 'Italic on'. Accordingly, the characters 'A' and 'B' are displayed based on  
5 the local display control information having the matching segment ID. In this case, characters 'A' and 'B' are displayed as italics.

As another example, a third set of character codes '0x41' (A) and '0x42' (B) have the text segment ID '2'. The DCSS  
10 includes local display control information having the same '2' text segment ID. As shown in Fig. 5, the font information in this local display control information is 'Italic off'. As such, normal face characters 'A' and 'B' are displayed.

Fig. 6 illustrates another example where local display  
15 control information is written in the text segment; however, in this embodiment, the local display control information is written separately from the text data of character codes. Here, the data structure of the local display control information is the same as that of Fig. 5, except that the local display  
20 control information further includes a length indicator. The length indicator indicates the number of characters in the associated portion of the text data (e.g., character codes) affected by the local display control information. In the example of Fig. 6, if the character codes '0x41' (A) and  
25 '0x42' (B) are preceded by the text segment ID '1' and the local display control information with the same text segment ID indicates 'italic on' and 'length = 2', then the 'data: 0x41, 0x42', (i.e., characters 'A' and 'B') are displayed in italics.

30 On the other hand, as shown in Fig. 6, if the character codes '0x41' (A) and '0x42' (B) are preceded by the text segment ID and the local display control information with the same text segment ID indicates 'italic off' and 'length = 2',

then the 'data: 0x41, 0x42' with normal face characters 'A' and 'B' are displayed.

Fig. 7 illustrates a block diagram of an exemplary optical disk reproducing apparatus in which the present invention may be advantageously embodied. As shown, the reproducing apparatus includes demux 101, a text decoder 102, a text image buffer 121, a BMP decoder 131, a BMP buffer 141, and an image controller 151.

The demux 101 receives data reproduced from the optical disk such as a BD-ROM by an optical pick-up (not shown) and demultiplexes the PES packet of a text subtitle into a text segment, a BMP segment, and a display control segment based on the sequence type information included in the PES packet (not shown) identifying the PES packet as a text subtitle PES.

The text decoder 102 comprises a text demux 110 and a text image generator 111. The text demux 110 demultiplexes the text segment from the demux 101 into text data of character codes and local display control information. The text image generator 111 converts the text data into text images based on the local display control information.

With reference to the local display control information such as the text font, the text size, italic, bold, and underline, the text image generator 111 decodes and converts the text data into corresponding text images, which are then temporarily stored in the text image buffer 121.

The BMP decoder 131 decodes the BMP data included in the BMP segment and outputs BMP images. The BMP buffer 141 stores the BMP images temporarily.

When the global display control information is stored with the text segment as shown in Fig. 2, the text demux 110 also demultiplexes this information from the text segment, and outputs (not shown) this information to the image controller 151. However, when the global display control information is

stored with the display control sequence segment as shown in Fig. 3, the demux 101 demultiplexes the global display control information along with the display control segment, and output this information to the image controller 151 as shown in Fig.

5 7.

The image controller 151 reads the text images temporarily stored in the text buffer 121 and the BMP images temporarily stored in the BMP buffer 141, and controls the display of the text and BMP images based on the display  
10 control sequence segment received from the demux 101 and the global display control information received from the text demux 110 or the demux 101.

While not shown, the local display control information may include timing information, which is different from the  
15 timing information for controlling the display timing of the subtitle images. This local display control timing information is intended for controlling the color changing timing of characters included in the subtitle.

Fig. 8 illustrates a schematic diagram of an embodiment  
20 of an optical disk recording and reproducing apparatus according to the present invention. As shown, an AV encoder 9 receives and encodes data (e.g., still image data, audio data, text subtitle data etc.). The AV encoder 9 outputs the encoded data along with coding information and stream attribute  
25 information. A multiplexer 8 multiplexes the encoded data based on the coding information and stream attribute information to create, for example, an MPEG-2 transport stream. A source packetizer 7 packetizes the transport packets from the multiplexer 8 into source packets in accordance with the  
30 audio/video format of the optical disk. As shown in Fig. 7, the operations of the AV encoder 9, the multiplexer 8 and the source packetizer 7 are controlled by a controller 10. The controller 10 receives user input on the recording operation,

and provides control information to AV encoder 9, multiplexer 8 and the source packetizer 7. For example, the controller 10 instructs the AV encoder 9 on the type of encoding to perform, instructs the multiplexer 8 on the transport stream to create, 5 and instructs the source packetizer 7 on the source packet format. The controller 10 further controls a drive 3 to record the output from the source packetizer 7 on the optical disk.

For example, based on information received via the user interface (e.g., instruction set saved on disk, provided over 10 an intranet or internet by a computer system, etc.) the controller 10 controls the drive 3 to record one or more of the data structures of Figs. 1-6 on the optical disk.

During reproduction, the controller 10 controls the drive 3 to reproduce this data structure. Based on the information 15 contained therein, as well as user input received over the user interface (e.g., control buttons on the recording and reproducing apparatus or a remote associated with the apparatus), the controller 10 controls the drive 3 to reproduce the data from the optical disk.

20 The reproduced source packets are received by a source depacketizer 4 and converted into a data stream (e.g., an MPEG-2 transport packet stream). A demultiplexer 5 demultiplexes the data stream into encoded data. An AV decoder 6 decodes the encoded data to produce the original data that 25 was feed to the AV encoder 9. During reproduction, the controller 10 controls the operation of the source depacketizer 4, demultiplexer 5 and AV decoder 6. The controller 10 receives user input on the reproducing operation, and provides control information to AV decoder 6, 30 demultiplexer 5 and the source packetizer 4. For example, the controller 10 instructs the AV decoder 9 on the type of decoding to perform, instructs the demultiplexer 5 on the transport stream to demultiplex, and instructs the source

depacketizer 4 on the source packet format. As will be appreciated, the logical blocks of this embodiment may be structured in accordance with the physical structure described in detail with respect to Fig. 7.

5        While Fig. 8 has been described as a recording and reproducing apparatus, it will be understood that only a recording or only a reproducing apparatus may be provided using those portions of Fig. 8 providing the recording or reproducing function.

10        The data structure for and method for managing text subtitle data on a high-density recording medium in accordance with embodiments of the present invention allows effective management of the reproduction of the text subtitle data. For example, reproducing a subtitle in accordance with the present  
15 invention allows subtitle data to be recorded as text data, the size of which will be less than image data, and the text data may be displayed as various subtitles based on the control information.

As apparent from the above description, the present  
20 invention provides methods and apparatuses for recording a data structure on a high density recording medium for managing reproduction of text subtitle data.

The above description further provides methods and apparatus for reproducing text subtitle data based on the data  
25 structure for managing the reproduction of the text subtitle data.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art, having the benefit of this disclosure, will appreciate  
30 numerous modifications and variations there from. For example, while described with respect to a Blu-ray ROM optical disk in several instances, the present invention is not limited to this standard of optical disk or to optical disks. It is

intended that all such modifications and variations fall within the spirit and scope of the invention.

# CLAIMS

1. A recording medium having a data structure for managing reproduction of a text subtitle data, comprising:  
a subtitle area storing a text subtitle stream including  
5 text subtitle data and at least one of global style information and local style information, the global style information providing at least one of composition information and rendering information, and the local style information providing font information for at least a portion of the text  
10 subtitle data.
2. The recording medium of claim 1, wherein the composition information includes position information for positioning a text subtitle represented by the text subtitle data on a display.
- 15 3. The recording medium of claim 2, wherein the rendering information includes a display effect of the text subtitle data.
4. The recording medium of claim 3, wherein the global style information includes the composition information and the  
20 rendering information.
5. The recording medium of claim 1, wherein the rendering information includes a display effect of the text subtitle data.
6. The recording medium of claim 1, wherein the font  
25 information includes at least one a font, font size and a font style.
7. The recording medium of claim 1, wherein local style information provides font information for a portion of the text subtitle data recorded sequentially after the local style  
30 information.
8. The recording medium of claim 1, wherein the text

subtitle data includes at least one text string.

9. The recording medium of claim 1, wherein the local style information is stored in association with the portion of the text subtitle data for which the local style information  
5 provides the font information.

10. The recording medium of claim 1, wherein the text subtitle stream is stored as at least one packetized elementary stream.

11. The recording medium of claim 1, wherein the text  
10 subtitle stream is stored as a plurality of transport packets.

12. A method of recording a data structure for managing reproduction of a text subtitle data, comprising:

recording a text subtitle stream on the recording medium, the text subtitle stream including text subtitle data and at  
15 least one of global style information and local style information, the global style information providing at least one of composition information and rendering information, and the local style information providing font information for at least a portion of the text subtitle data.

20 13. A method of reproducing a data structure for managing reproduction of a text subtitle data, comprising:

reproducing a text subtitle stream from the recording medium, the text subtitle stream including text subtitle data and at least one of global style information and local style  
25 information, the global style information providing at least one of composition information and rendering information, and the local style information providing font information for at least a portion of the text subtitle data.

14. An apparatus for recording a data structure for  
30 managing reproduction of a text subtitle data, comprising:

a driver for driving an optical recording device to record data on the recording medium;

a controller for controlling the driver to record a text



subtitle stream on the recording medium, the text subtitle stream including text subtitle data and at least one of global style information and local style information, the global style information providing at least one of composition  
5 information and rendering information, and the local style information providing font information for at least a portion of the text subtitle data.

15. An apparatus for reproducing a data structure for managing reproduction of a text subtitle data, comprising:  
10 a driver for driving an optical reproducing device to reproduce data recorded on the recording medium;

a controller for controlling the driver to reproduce a text subtitle stream from the recording medium, the text subtitle stream including text subtitle data and at least one  
15 of global style information and local style information, the global style information providing at least one of composition information and rendering information, and the local style information providing font information for at least a portion of the text subtitle data.

20

**FIG. 1****Subtitle PES Packet Structure**

```

PTS
Number_of_Text_objects
Number_of_BMP_objects
Text_presence_flag
BMP_presence_flag
Page_composition_segment ()
Global pallete
Global transparency array
Region_composition_segment ()
    num_of_objects
    for (i=0; i<num_of_objects; i++){
        object_id
        object_horizontal_position
        object_vertical_position
    }
}

Text_segment (){
    for (i=0; i<num_of_TEXT_objects; i++){
        object_id
        num_of_charactor codes
        for (j=0; j<num_of_charactor codes; j++){
            charactor code
        }
    }
}

BMP_segment (){
    for (i=0; i<num_of_BMP_objects; i++){
        object_id
        BMP
    }
}

Display_control_sequences_segment (){
    for (i=0; i<num_of_display_sequences; i++){
        Display_sequence (){
            object_id
            Cut in time & Cut out time of the dislay control sequence
            MNG chunk like information
        }
    }
}

```

FIG. 2

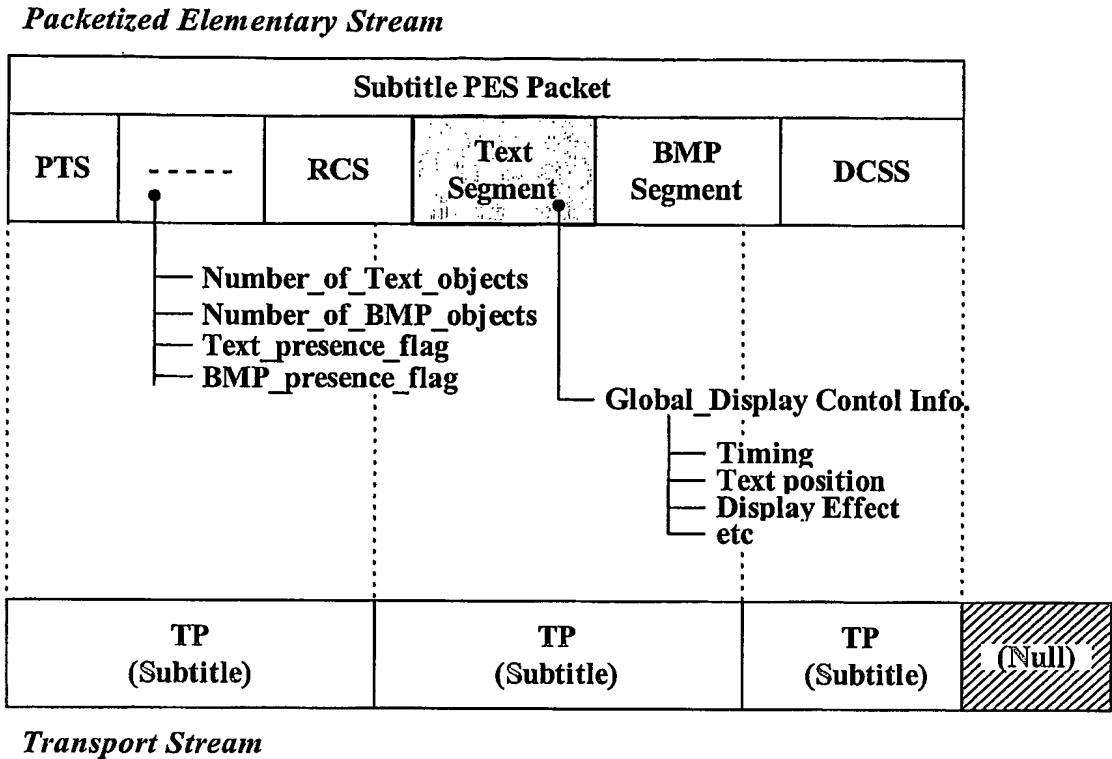


FIG. 3

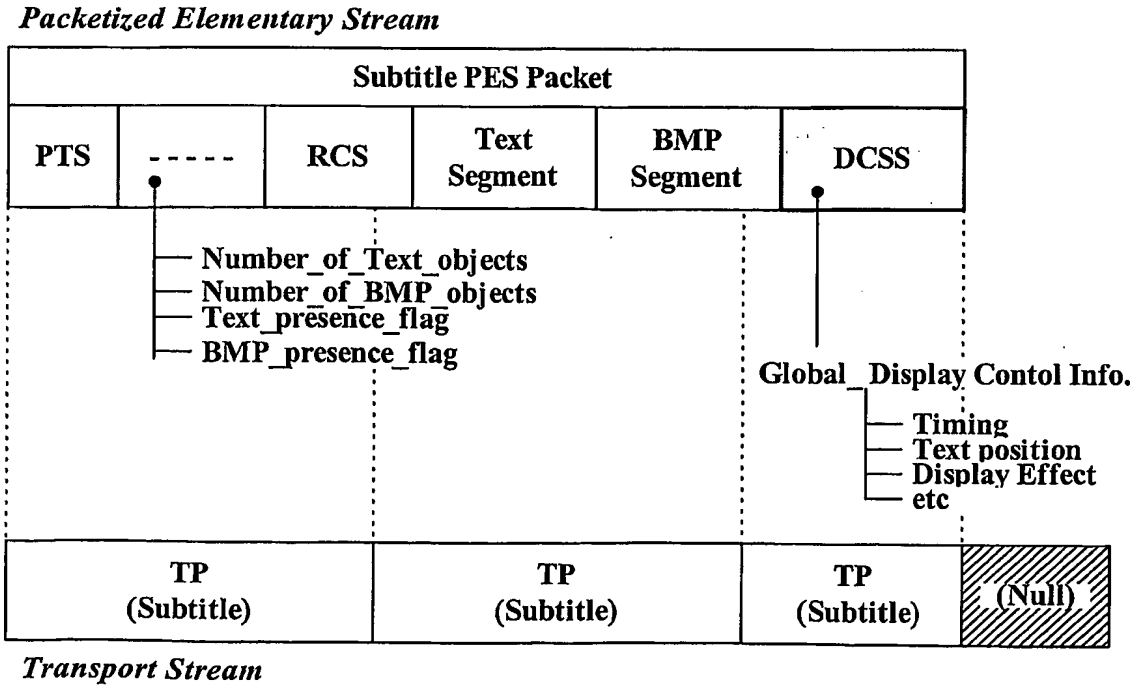


FIG. 4

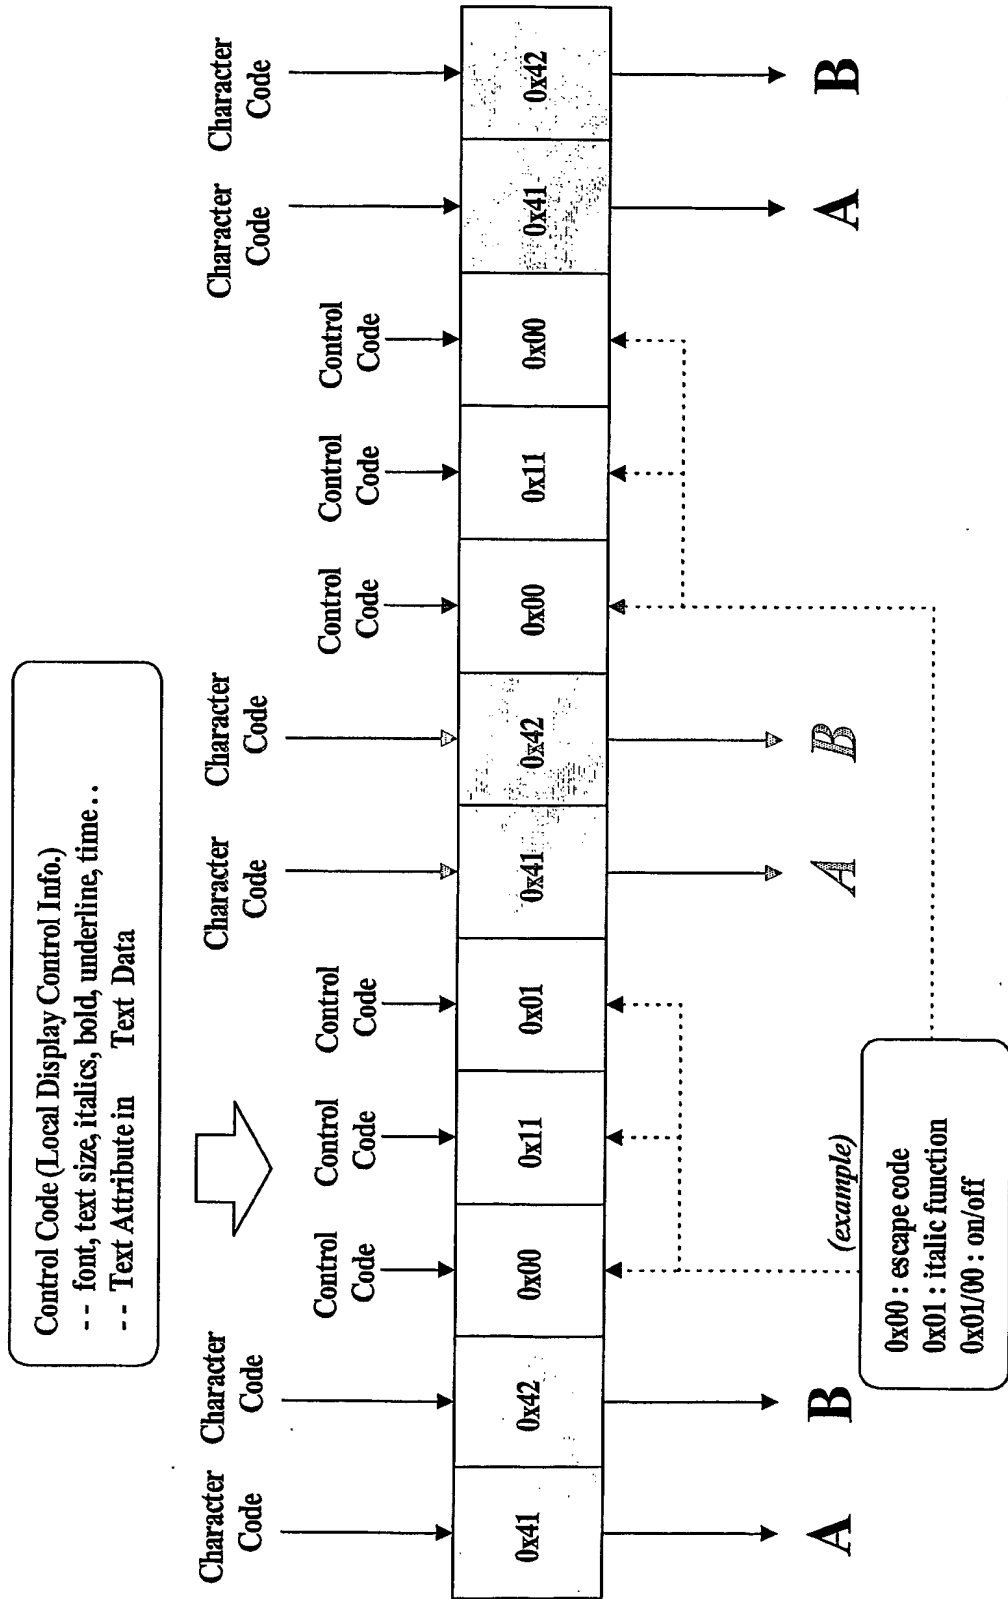


FIG. 5

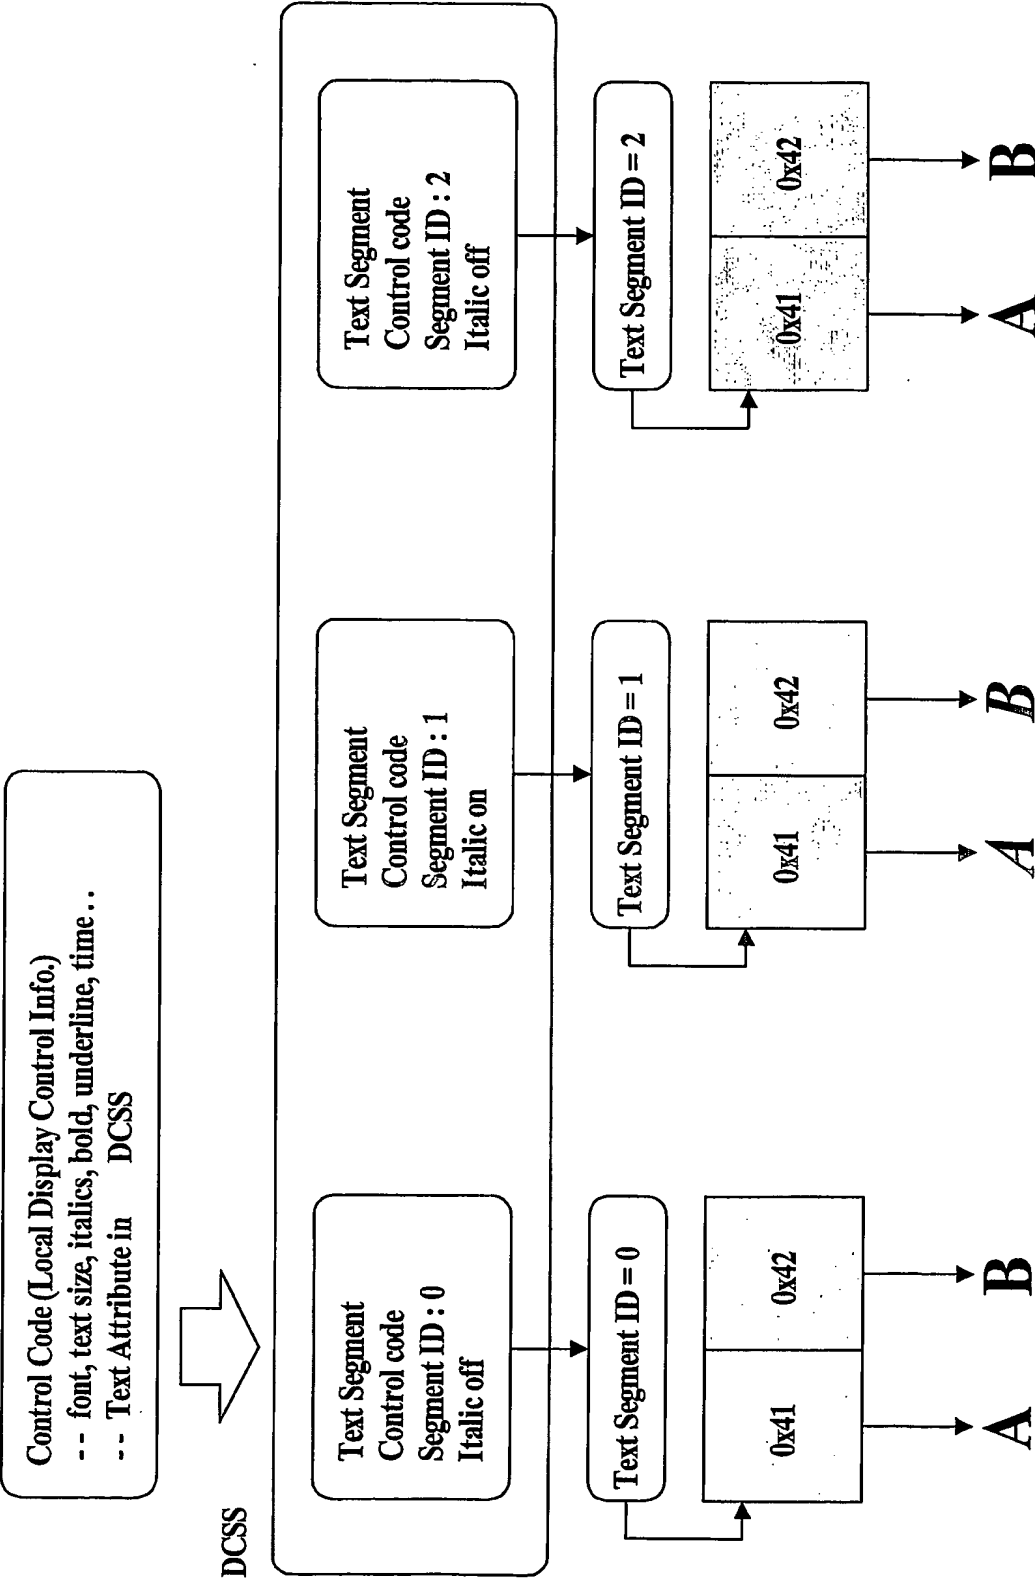


FIG. 6

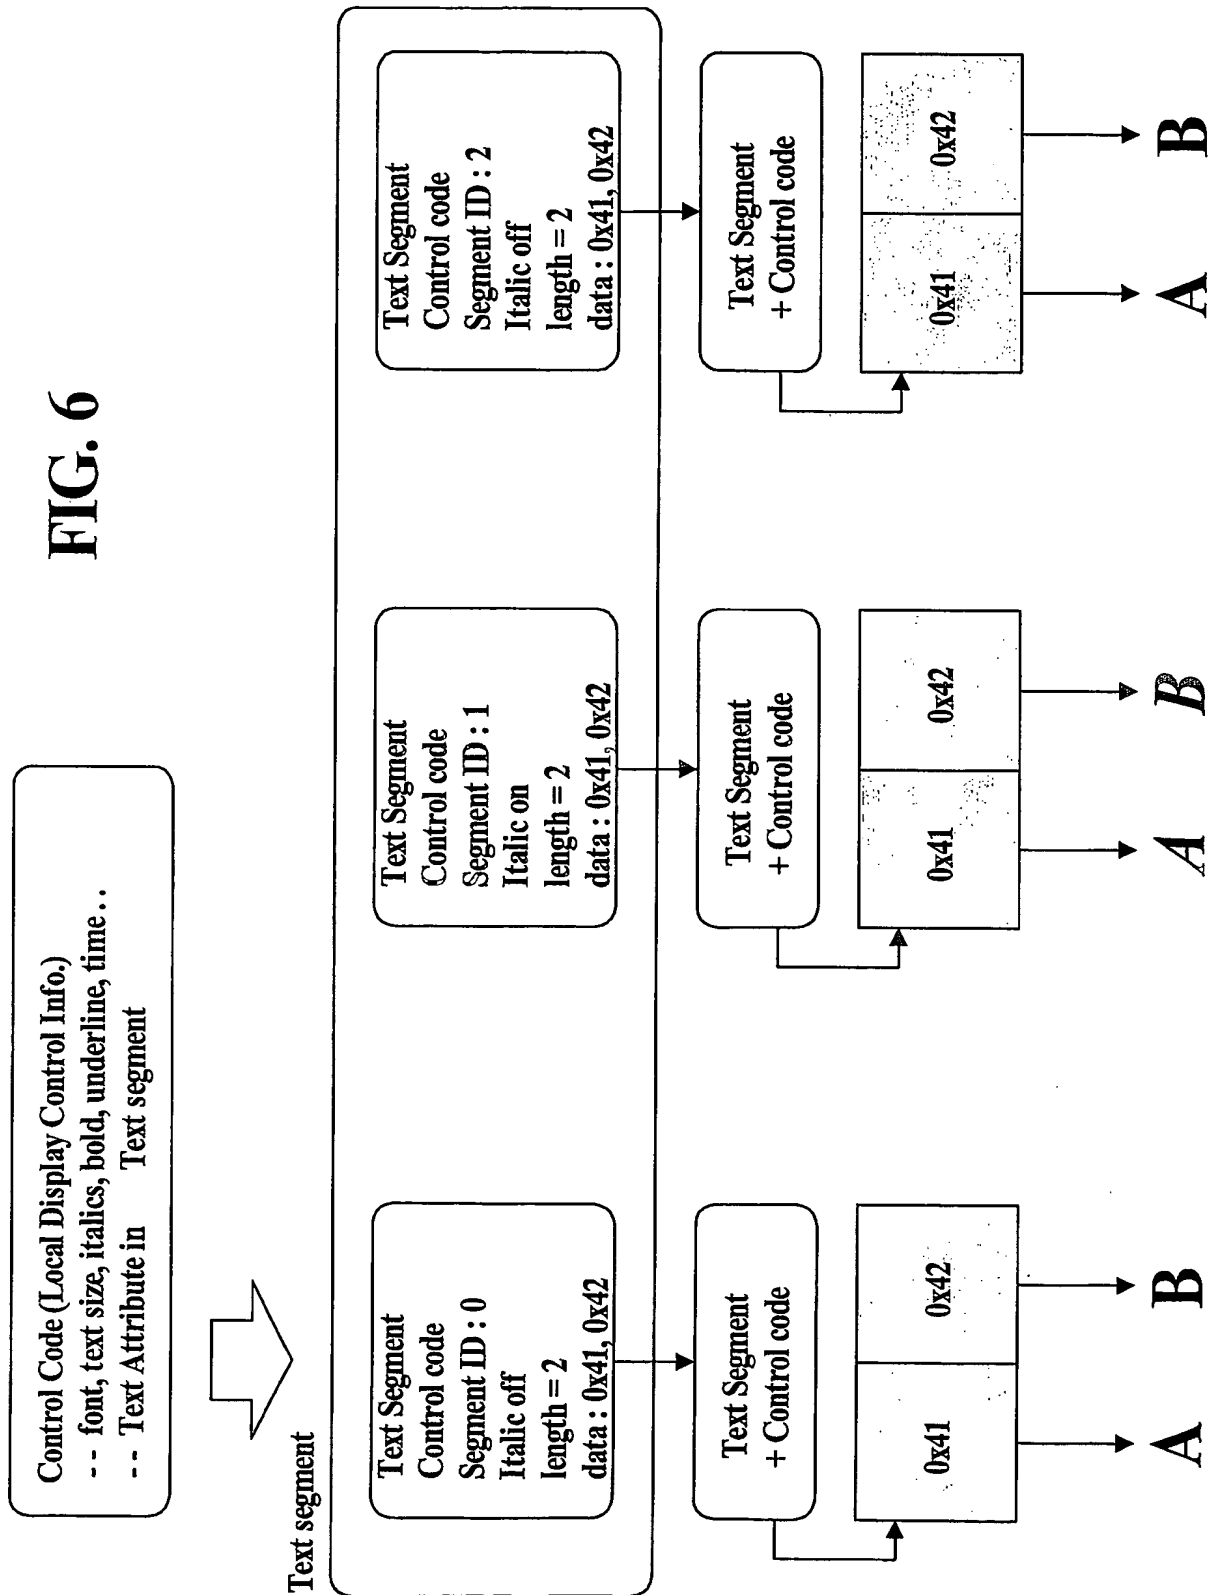


FIG. 7


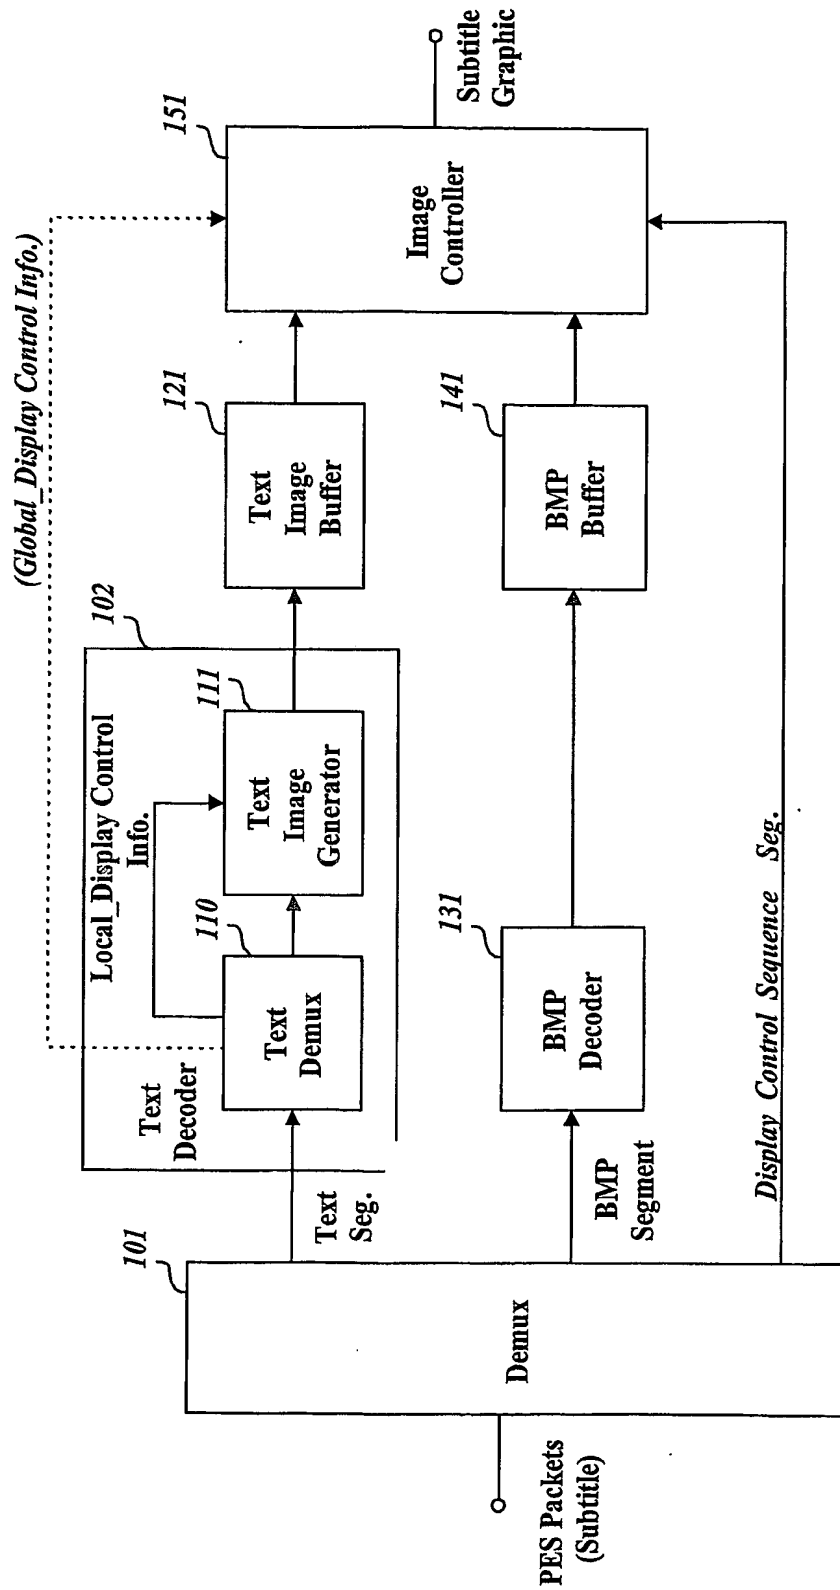


FIG. 8



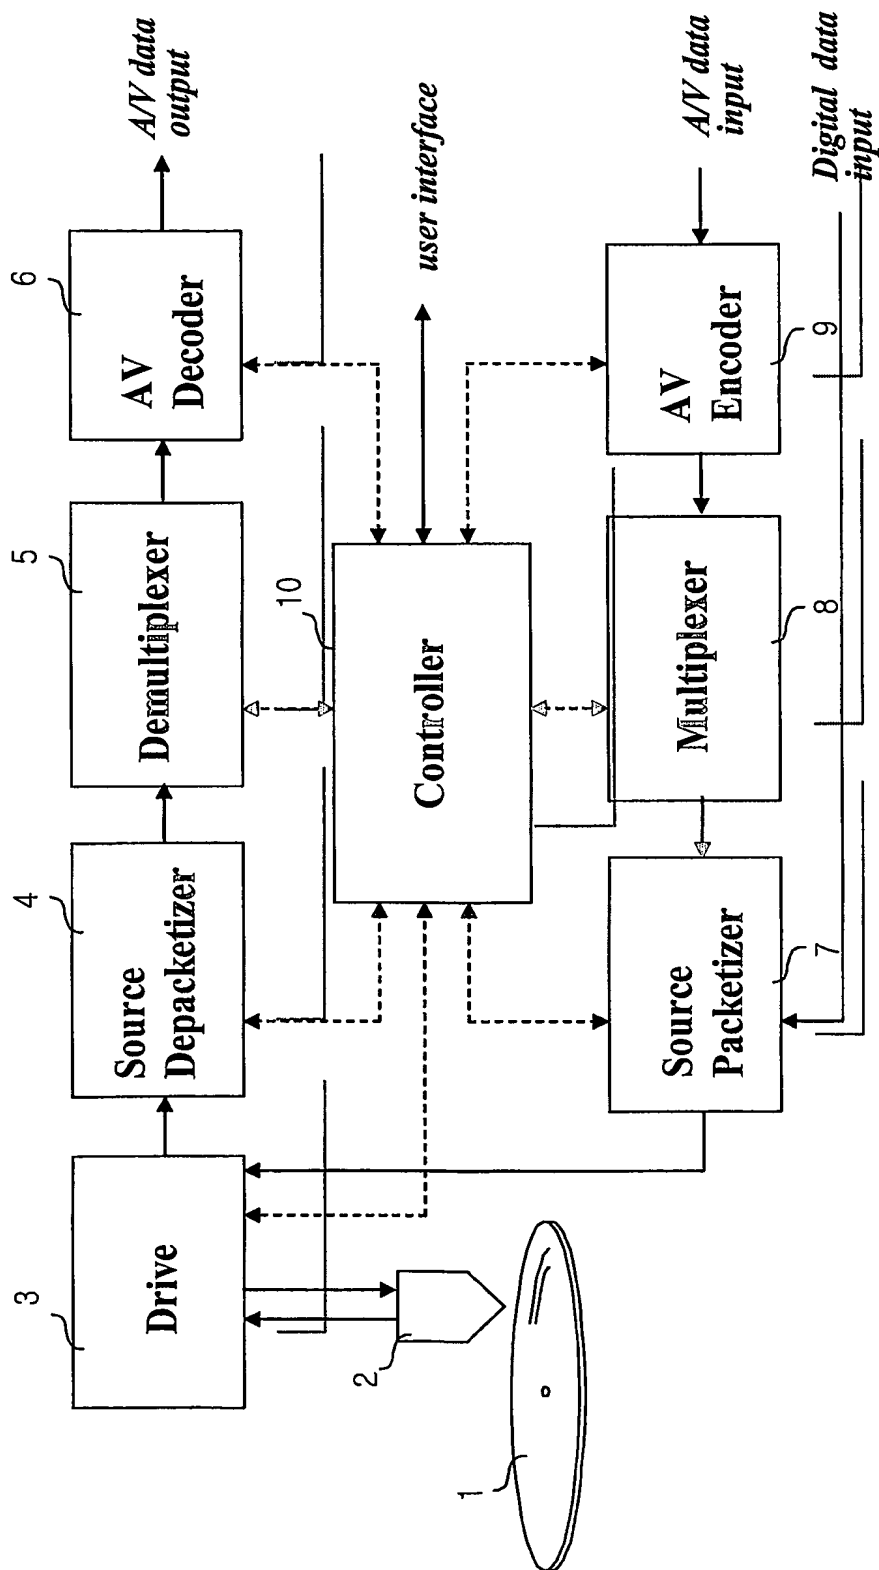

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR2004/000814

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7 G11B 19/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7 G11B 19/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Patents and applications for inventions since 1975

Korean Utility models and applications for Utility models since 1975

Japanese Utility models and applications for Utility models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, JAPIO, KIPASS

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
EA	KR 2004-34403 A (SAMSUNG CORP.) 28 APR 2004 see the whole document.	1,12-15
A	US 05949752 A (WEA MANUFACTURING INC.) 07 SEP 1999 see the whole document.	1,12-15

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 JUNE 2004 (22.06.2004)

Date of mailing of the international search report

24 JUNE 2004 (24.06.2004)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

CHOI, Jeon Seok

Telephone No. 82-42-481-5696

